

Let Your Robot Run Freely

Drive-by-wire robot chassis for inspection, delivery, emergency rescue and special-environment operations.

线控移动机器人底盘 · 面向巡检 / 配送 / 应急救援 / 特种作业

12

Tracked
履带式

9

Wheeled
轮式

2

Wall-Climbing
爬壁式

Product Selection Guide 选型总览

Tracked Chassis 履带式 · 12 Models

Model 型号	Type 类型	Payload 载重 kg	Max Speed 速度	Length 车长 mm	List Price 报价 USD
AT-T10	Micro Tracked Chassis	10	5 km/h	610	\$3,400
AT-T15	Micro Tracked Chassis	15	5 km/h	775	\$4,300
AT-T20	Micro Tracked Chassis	20	10 km/h	943	\$8,000
AT-T65	Compact Tracked Chassis	65	6.2 km/h	960	\$7,000
AT-T100	Mid Tracked Chassis	100	6 / 11 km/h	1020	\$8,000 – \$9,350
AT-T125	Mid Tracked Chassis	125	6.2 km/h	1190	\$9,000
AT-T200	Heavy Tracked Chassis	200	3.3 km/h	1020	\$9,350
AT-T310	Heavy Tracked Chassis	310	5.4 km/h	1430	\$16,550
AT-T350	Heavy Tracked Chassis	350	5.4 km/h	1310	\$15,000
AT-T400	Ultra Tracked Chassis	400	4.7 km/h	1670	\$16,250
AT-T500-S	Ultra Tracked Chassis	500	15 km/h	1990	\$69,600
AT-T500-L	Ultra Tracked Chassis	500	20 km/h	2910	\$102,000

Product Selection Guide 选型总览

Wheeled Chassis 轮式 · 9 Models

Model 型号	Type 类型	Payload 载重 kg	Max Speed 速度	Length 车长 mm	List Price 报价 USD
AT-W18	Micro Wheeled Chassis	18	3.4 km/h	430	\$3,150
AT-W25	Compact Wheeled Chassis	25	3.6 km/h	718	\$3,400
AT-W50-S	Compact Wheeled Chassis	50	16 km/h	908	\$5,750
AT-W50-L	Compact Wheeled Chassis	50	9 km/h	1000	\$22,400
AT-W100	Mid Wheeled Chassis	100	6.5 km/h	1043	\$7,450
AT-W125	Mid Wheeled Chassis	125	5.5 km/h	955	\$7,850
AT-W220	Heavy Wheeled Chassis	220	2.3 m/s	1530	\$14,600
AT-W235	Heavy Wheeled Chassis	235	16 km/h	1450	\$22,400
AT-W250	Heavy Wheeled Chassis	250	15 km/h	1530	\$22,400

Product Selection Guide 选型总览

Wall-Climbing Chassis 爬壁式 · 2 Models

Model 型号	Type 类型	Payload 载重 kg	Max Speed 速度	Length 车长 mm	List Price 报价 USD
AT-G10	Micro Wall-Climbing Chassis	10	0.39 m/s	390	\$5,200
AT-G40	Compact Wall-Climbing Chassis	40	0.16 m/s	610	\$16,800


All prices in USD, EXW China, standard configuration (drive, VCU, radio controller, battery and charger included). Freight, taxes and optional peripherals quoted separately.
报价为美元 EXW 中国口岸，含标配整机；运费、税费与选配外设另计。

AT-T10

Micro Tracked Chassis · 微型履带式底盘



FRONT 3/4 · 前 3/4 视角

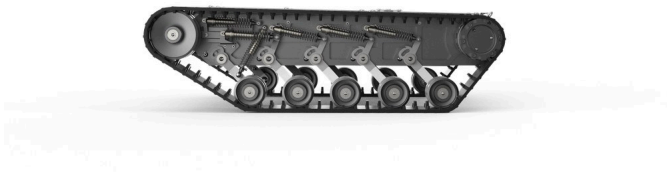


SIDE · 侧视

Rated Payload 额定载重	10 kg	Max Speed 最高行驶速度	0–5 km/h
Dimensions (L×W×H) 外形尺寸(mm)	610 × 480 × 180 mm	Chassis Weight 底盘自重	18.5 kg (including battery)
Ground Clearance 最小离地间隙	70 mm	Protection Rating 防护等级	IP54
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	100 mm
Travel Unit 行走机构	Rubber (embedded with Kevlar)	Track Width 履带宽度	80 mm
Suspension 悬挂形式	Christie suspension, 12 shock absorbers	Wheel Diameter 轮/驱动轮直径	70 mm
Rated Torque 额定扭矩	6.6 N·m	Drive Power 驱动功率	138W × 2
Supply Voltage 供电电压	DC 24V	Remote Range 遥控距离	200 m (line of sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T15

Micro Tracked Chassis · 微型履带式底盘

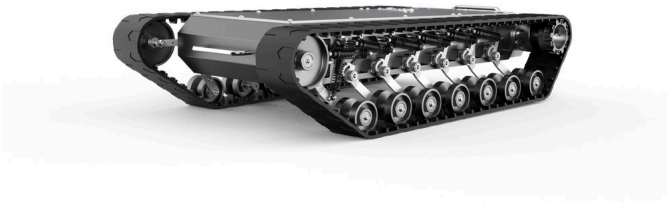

FRONT 3/4 · 前 3/4 视角

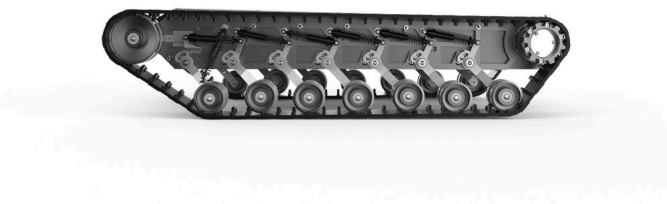

SIDE · 侧视

Rated Payload 额定载重	15 kg
Dimensions (L×W×H) 外形尺寸(mm)	775 × 480 × 180 mm
Ground Clearance 最小离地间隙	70 mm
Max Climbing 最大爬坡度	30°
Travel Unit 行走机构	Rubber (embedded with Kevlar)
Suspension 悬挂形式	Christie suspension, 16 shock absorbers
Rated Torque 额定扭矩	6.6 N·m
Supply Voltage 供电电压	DC 24V

Max Speed 最高行驶速度	0–5 km/h
Chassis Weight 底盘自重	20 kg
Protection Rating 防护等级	IP64
Vertical Obstacle 垂直越障	100 mm
Track Width 履带宽度	80 mm
Wheel Diameter 轮/驱动轮直径	70 mm
Drive Power 驱动功率	138W × 2
Remote Range 遥控距离	200 m (line of sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T20

Micro Tracked Chassis · 微型履带式底盘



FRONT 3/4 · 前 3/4 视角

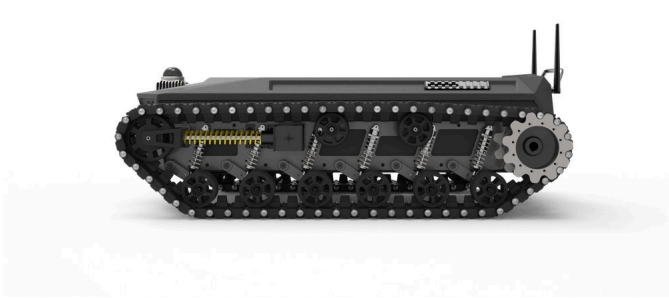


SIDE · 侧视

Rated Payload 额定载重	20 kg	Max Speed 最高行驶速度	10 km/h
Dimensions (L×W×H) 外形尺寸(mm)	943 × 546 × 317 mm	Chassis Weight 底盘自重	≤50 kg
Ground Clearance 最小离地间隙	>85 mm	Protection Rating 防护等级	IP64 / IP65
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	100 mm
Travel Unit 行走机构	Composite, low rolling resistance	Track Width 履带宽度	112 mm
Suspension 悬挂形式	12 independent shock absorbers (left/right)	Drive Power 驱动功率	430W × 2 (can run continuously at 1.1kW × 2)
Battery 电池	48V 30Ah	Supply Voltage 供电电压	DC 48V
Remote Range 遥控距离	>200 m (line of sight)		


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T65

Compact Tracked Chassis · 紧凑型履带式底盘

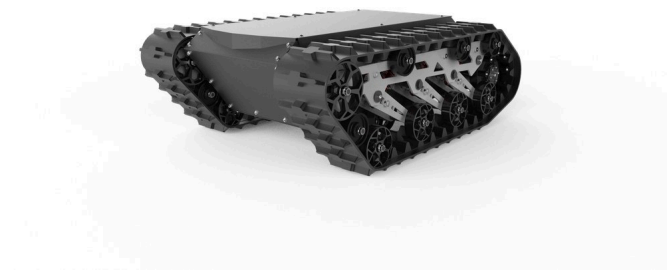

FRONT 3/4 · 前 3/4 视角

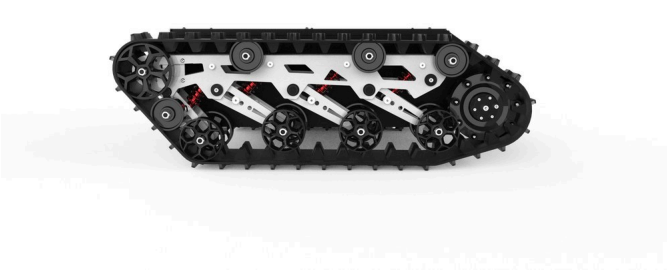


SIDE · 侧视

Rated Payload 额定载重	65 kg	Max Speed 最高行驶速度	0–6.2 km/h (min. fine-tune speed: 0.6 km/h)
Dimensions (L×W×H) 外形尺寸(mm)	960 × 700 × 330 mm	Chassis Weight 底盘自重	105 kg
Ground Clearance 最小离地间隙	75 ± 10 mm (depending on load)	Protection Rating 防护等级	IP54 (upgradable to IP64)
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	125 mm (depending on center of gravity)
Travel Unit 行走机构	High-quality rubber embedded with Kevlar fiber	Track Width 履带宽度	150 mm
Suspension 悬挂形式	8 independent hydraulic damping shock absorbers (left/right)	Drive Power 驱动功率	2 × 785 W
Supply Voltage 供电电压	DC 48V	Remote Range 遥控距离	>200 m (line of sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T100

Mid Tracked Chassis · 中型履带式底盘

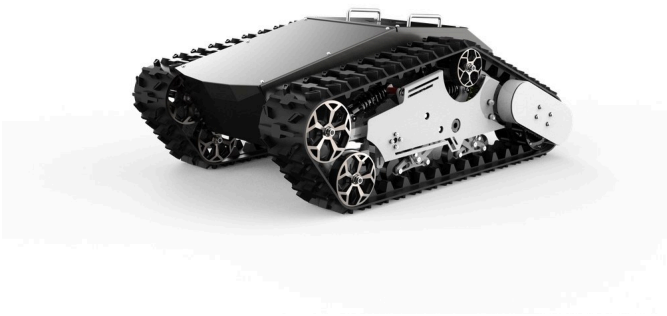

FRONT 3/4 · 前 3/4 视角

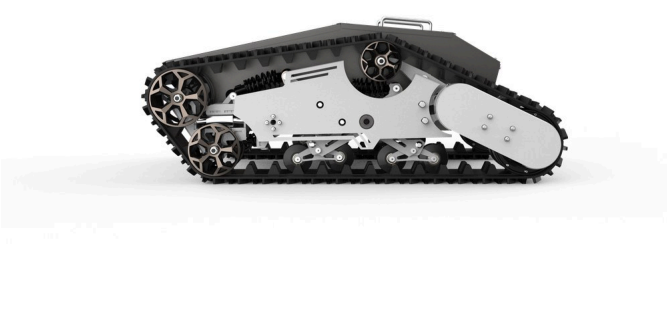

SIDE · 侧视


Rated Payload 额定载重	100 kg
Dimensions (L×W×H) 外形尺寸(mm)	1020 × 750 × 405 mm
Ground Clearance 最小离地间隙	115 mm
Max Climbing 最大爬坡度	30° (stair-climbing capable)
Travel Unit 行走机构	Rubber (embedded with Kevlar)
Suspension 悬挂形式	Christie suspension × 6 shock absorbers
Rated Torque 额定扭矩	81 N·m / 81.75 N·m
Supply Voltage 供电电压	DC 48V

Max Speed 最高行驶速度	0–6 km/h / 0–11 km/h
Chassis Weight 底盘自重	130 kg / 135 kg
Protection Rating 防护等级	IP54 (upgradable to IP64)
Vertical Obstacle 垂直越障	150 mm
Track Width 履带宽度	150 mm
Wheel Diameter 轮/驱动轮直径	150 mm
Drive Power 驱动功率	1–2 kW
Remote Range 遥控距离	>200 m (line of sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T125

Mid Tracked Chassis · 中型履带式底盘

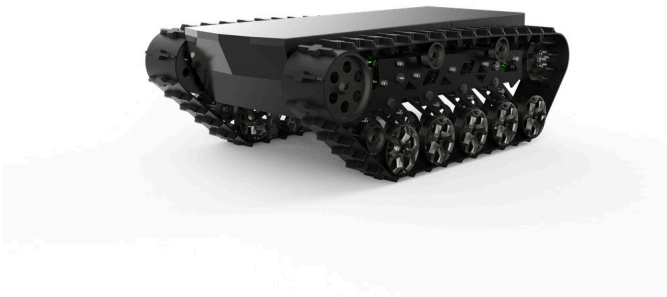

FRONT 3/4 · 前 3/4 视角

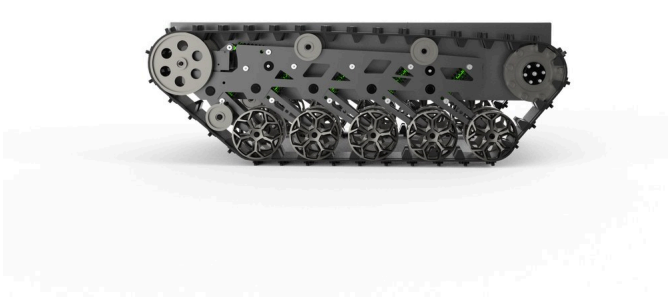


SIDE · 侧视

Rated Payload 额定载重	125 kg	Max Speed 最高行驶速度	0–6.2 km/h (min. fine-tune speed: 0.6 km/h)
Dimensions (L×W×H) 外形尺寸(mm)	1190 × 765 × 435 mm	Chassis Weight 底盘自重	155 kg
Ground Clearance 最小离地间隙	185 ± 10 mm (depending on load)	Protection Rating 防护等级	IP54 (upgradable to IP64)
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	145 mm (depending on center of gravity)
Travel Unit 行走机构	High-quality rubber embedded with Kevlar fiber	Track Width 履带宽度	150 mm
Suspension 悬挂形式	8 independent hydraulic damping shock absorbers (left/right)	Drive Power 驱动功率	2 × 1500 W
Supply Voltage 供电电压	DC 48V	Remote Range 遥控距离	200 m (external antenna)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T200

Heavy Tracked Chassis · 重型履带式底盘

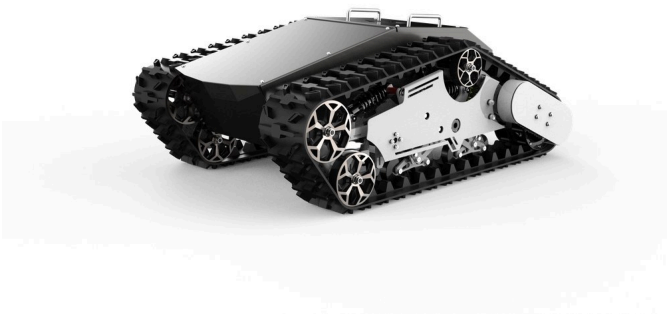

FRONT 3/4 · 前 3/4 视角

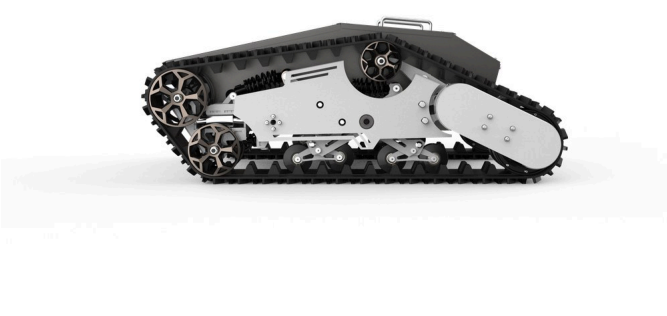

SIDE · 侧视

Rated Payload 额定载重	200 kg
Dimensions (L×W×H) 外形尺寸(mm)	1020 × 953 × 405 mm
Ground Clearance 最小离地间隙	115 mm
Max Climbing 最大爬坡度	30° (stair-climbing capable)
Travel Unit 行走机构	Rubber (embedded with Kevlar)
Suspension 悬挂形式	Christie suspension × 6 shock absorbers
Rated Torque 额定扭矩	270.5 N·m
Supply Voltage 供电电压	DC 48V

Max Speed 最高行驶速度	0–3.3 km/h
Chassis Weight 底盘自重	150 kg
Protection Rating 防护等级	IP54 (upgradable to IP64)
Vertical Obstacle 垂直越障	150 mm
Track Width 履带宽度	150 mm
Wheel Diameter 轮/驱动轮直径	150 mm
Drive Power 驱动功率	1–2 kW
Remote Range 遥控距离	>200 m (line of sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T310

Heavy Tracked Chassis · 重型履带式底盘



FRONT 3/4 · 前 3/4 视角

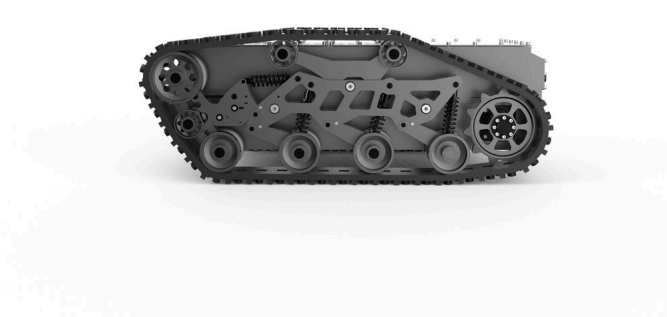

SIDE · 侧视


Rated Payload 额定载重	310 kg
Dimensions (L×W×H) 外形尺寸(mm)	1430 × 945 × 540 mm
Ground Clearance 最小离地间隙	140 mm
Max Climbing 最大爬坡度	30°
Travel Unit 行走机构	Rubber (embedded with steel core)
Suspension 悬挂形式	Christie suspension, 8 shock absorbers
Drive Power 驱动功率	(max) 2 × 3 kW
Remote Range 遥控距离	200 m (external antenna)

Max Speed 最高行驶速度	0–5.4 km/h
Chassis Weight 底盘自重	390 kg
Protection Rating 防护等级	IP64
Vertical Obstacle 垂直越障	200 mm
Track Width 履带宽度	150 mm
Wheel Diameter 轮/驱动轮直径	310 mm
Supply Voltage 供电电压	DC 48V


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T350

Heavy Tracked Chassis · 重型履带式底盘

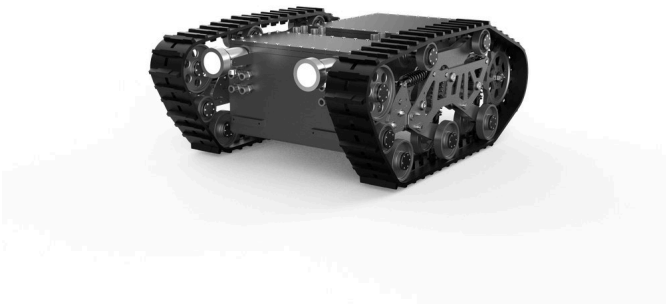

FRONT 3/4 · 前 3/4 视角

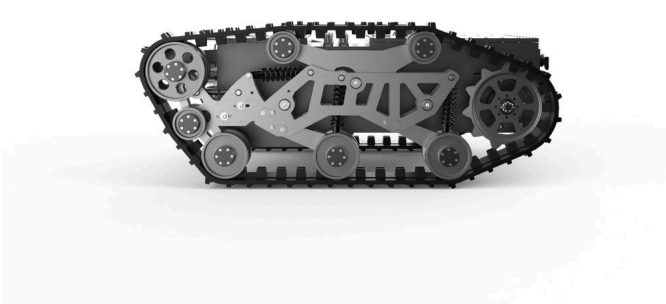

SIDE · 侧视

Rated Payload 额定载重	350 kg
Dimensions (L×W×H) 外形尺寸(mm)	1310 × 945 × 530 mm
Ground Clearance 最小离地间隙	140 mm
Max Climbing 最大爬坡度	30°
Travel Unit 行走机构	Rubber (embedded with steel core)
Suspension 悬挂形式	Christie suspension, 6 shock absorbers
Drive Power 驱动功率	2 × 3 kW
Remote Range 遥控距离	200 m (external antenna)

Max Speed 最高行驶速度	0–5.4 km/h
Chassis Weight 底盘自重	300 kg
Protection Rating 防护等级	IP64
Vertical Obstacle 垂直越障	150 mm
Track Width 履带宽度	150 mm
Wheel Diameter 轮/驱动轮直径	310 mm
Supply Voltage 供电电压	DC 48 V

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T400

Ultra Tracked Chassis · 超重型履带式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	400 kg
Dimensions (L×W×H) 外形尺寸(mm)	1670 × 1020 × 540 mm
Ground Clearance 最小离地间隙	180 mm
Max Climbing 最大爬坡度	15° (full load at 4.7 km/h) / 30° (full load at 1.5 km/h)
Travel Unit 行走机构	Engineering rubber track (embedded with steel core)
Suspension 悬挂形式	Christie suspension, 10 shock absorbers
Drive Power 驱动功率	2 × 3 kW
Remote Range 遥控距离	200 m (external antenna)

Max Speed 最高行驶速度	0–4.7 km/h
Chassis Weight 底盘自重	392 kg
Protection Rating 防护等级	IP54 / 64
Vertical Obstacle 垂直越障	220 mm
Track Width 履带宽度	200 mm
Wheel Diameter 轮/驱动轮直径	255 mm
Supply Voltage 供电电压	DC 48 V

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T500-S

Ultra Tracked Chassis · 超重型履带式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	500 kg	Max Speed 最高行驶速度	0-15 km/h
Dimensions (L×W×H) 外形尺寸(mm)	1990±30 × 1710±10 × 890±25 mm	Chassis Weight 底盘自重	900 kg
Ground Clearance 最小离地间隙	255±25 mm (subject to load)	Protection Rating 防护等级	IP54 (IP64 optional)
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	400 mm
Travel Unit 行走机构	High-quality rubber with embedded Kevlar fiber	Track Width 履带宽度	280 mm
Suspension 悬挂形式	8 left-right independent hydraulic damping shock absorbers	Drive Power 驱动功率	2 × 15000 W
Supply Voltage 供电电压	DC 96 V	Remote Range 遥控距离	200 m (line-of-sight)


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-T500-L

Ultra Tracked Chassis · 超重型履带式底盘



FRONT 3/4 · 前 3/4 视角

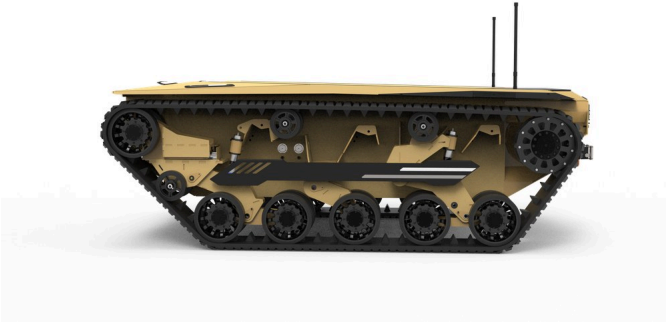


SIDE · 侧视

Rated Payload 额定载重	500 kg	Max Speed 最高行驶速度	0–20 km/h
Dimensions (L×W×H) 外形尺寸(mm)	2910±30 (varies with tension) × 1580±10 × 950±50 mm (varies with load & suspension pressure)	Chassis Weight 底盘自重	1900 kg
Ground Clearance 最小离地间隙	255±50 mm (subject to load)	Protection Rating 防护等级	IP54 (IP64 optional)
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	500 mm
Travel Unit 行走机构	High-quality rubber with embedded Kevlar fiber	Track Width 履带宽度	280 mm
Suspension 悬挂形式	6 left-right independent air shock absorbers	Drive Power 驱动功率	2 × 30 kW
Battery 电池	DC 48V 120Ah	Supply Voltage 供电电压	DC 320 V
Remote Range 遥控距离	200 m (line-of-sight)		


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W18

Micro Wheeled Chassis · 微型轮式底盘

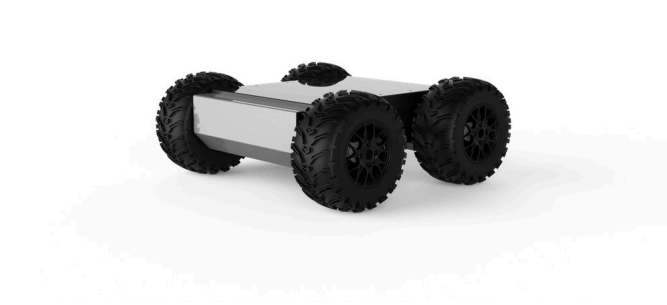

FRONT 3/4 · 前 3/4 视角

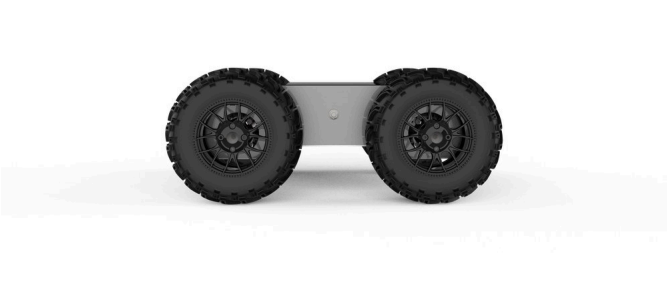


SIDE · 侧视

Rated Payload 额定载重	≤18 kg	Max Speed 最高行驶速度	3.4 km/h
Dimensions (L×W×H) 外形尺寸(mm)	430 × 434 × 175 mm	Chassis Weight 底盘自重	≤12 kg
Ground Clearance 最小离地间隙	50 mm	Protection Rating 防护等级	IP54
Max Climbing 最大爬坡度	≥20°	Vertical Obstacle 垂直越障	≥80 mm
Drive Power 驱动功率	250W brushless DC	Wheel Diameter 轮/驱动轮直径	175 mm
Rated Torque 额定扭矩	3 Nm	Supply Voltage 供电电压	24V


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W25

Compact Wheeled Chassis · 紧凑型轮式底盘

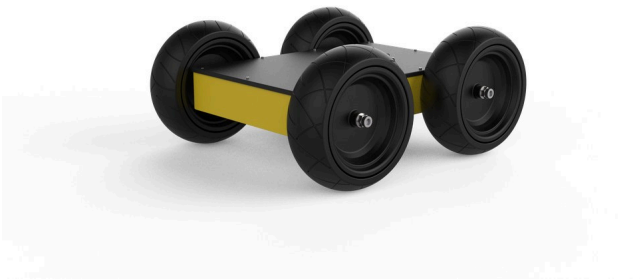

FRONT 3/4 · 前 3/4 视角

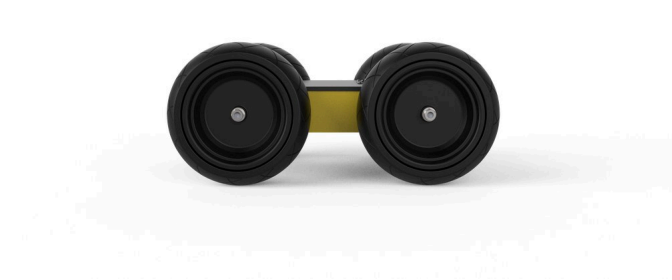

SIDE · 侧视

Rated Payload 额定载重	25 kg	Max Speed 最高行驶速度	3.6 km/h
Dimensions (L×W×H) 外形尺寸(mm)	718 × 616 × 310 mm	Chassis Weight 底盘自重	40 kg
Ground Clearance 最小离地间隙	110 mm	Protection Rating 防护等级	IP64
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	90 mm
Travel Unit 行走机构	Pneumatic / solid tire	Drive Power 驱动功率	24V Brushless DC motor
Wheel Diameter 轮/驱动轮直径	310 mm	Steering 转向方式	Differential steering
Supply Voltage 供电电压	DC 24 V		


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W50-S

Compact Wheeled Chassis · 紧凑型轮式底盘



FRONT 3/4 · 前 3/4 视角

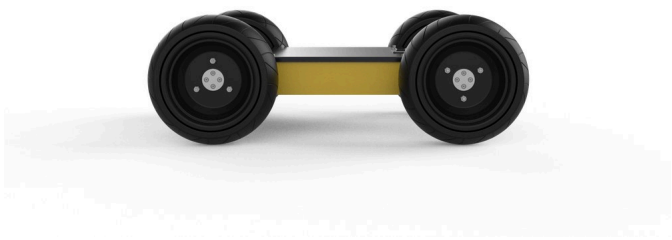

SIDE · 侧视

Rated Payload 额定载重	50 kg	Max Speed 最高行驶速度	16 km/h
Dimensions (L×W×H) 外形尺寸(mm)	908 × 708 × 310 mm	Chassis Weight 底盘自重	60 kg
Ground Clearance 最小离地间隙	98 mm	Protection Rating 防护等级	IP64
Max Climbing 最大爬坡度	30°	Vertical Obstacle 垂直越障	150 mm
Drive Power 驱动功率	48V Brushless DC motor	Wheel Diameter 轮/驱动轮直径	310 mm
Steering 转向方式	Differential steering	Rated Torque 额定扭矩	40 N·m
Supply Voltage 供电电压	DC 48 V		

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W50-L

Compact Wheeled Chassis · 紧凑型轮式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	50 kg
Dimensions (L×W×H) 外形尺寸(mm)	1000 × 540 × 350 mm
Protection Rating 防护等级	IP54
Vertical Obstacle 垂直越障	50 mm
Suspension 悬挂形式	2 front, 2 rear
Drive Power 驱动功率	300 W (drive)
Remote Range 遥控距离	300 m (line-of-sight)

Max Speed 最高行驶速度	0–9 km/h
Chassis Weight 底盘自重	45 kg
Max Climbing 最大爬坡度	15°
Travel Unit 行走机构	Puncture-proof explosion-proof rubber tire / 8"
Battery 电池	24V / 30Ah
Supply Voltage 供电电压	DC 24 V


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W100

Mid Wheeled Chassis · 中型轮式底盘



FRONT 3/4 · 前 3/4 视角

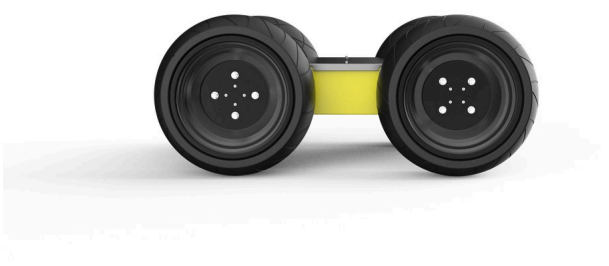

SIDE · 侧视

Rated Payload 额定载重	100 kg
Dimensions (L×W×H) 外形尺寸(mm)	1043 × 798 × 440 mm
Ground Clearance 最小离地间隙	150 mm
Max Climbing 最大爬坡度	30°
Drive Power 驱动功率	48V Brushless DC motor
Steering 转向方式	Differential steering
Supply Voltage 供电电压	DC 48 V

Max Speed 最高行驶速度	≥6.5 km/h
Chassis Weight 底盘自重	100 kg
Protection Rating 防护等级	IP64
Vertical Obstacle 垂直越障	200 mm
Wheel Diameter 轮/驱动轮直径	440 mm
Rated Torque 额定扭矩	189 N·m

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W125

Mid Wheeled Chassis · 中型轮式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	125 kg
Dimensions (L×W×H) 外形尺寸(mm)	955 × 690 × 400 mm
Protection Rating 防护等级	IP54 (IP64 optional)
Drive Power 驱动功率	2 × 1500 W
Wheel Diameter 轮/驱动轮直径	390 mm

Max Speed 最高行驶速度	0–5.5 km/h
Ground Clearance 最小离地间隙	125±15 mm (subject to load)
Max Climbing 最大爬坡度	30°
Battery 电池	48V
Supply Voltage 供电电压	DC 48 V

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W220

Heavy Wheeled Chassis · 重型轮式底盘

 **Aerosys Technology**



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	220 kg	Max Speed 最高行驶速度	≥2.3 m/s
Dimensions (L×W×H) 外形尺寸(mm)	1530±5 × 1150±5 × 630±10 mm	Chassis Weight 底盘自重	350 kg (excl. battery)
Ground Clearance 最小离地间隙	175±6 mm	Protection Rating 防护等级	IP54
Max Climbing 最大爬坡度	30° (subject to center of gravity)	Vertical Obstacle 垂直越障	200 mm (subject to center of gravity)
Track Width 履带宽度	1150 mm	Drive Power 驱动功率	48V Brushless DC motor
Wheel Diameter 轮/驱动轮直径	640 mm	Steering 转向方式	Differential steering
Rated Torque 额定扭矩	1150 N·m	Supply Voltage 供电电压	DC 48 V

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W235

Heavy Wheeled Chassis · 重型轮式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	235KG
Dimensions (L×W×H) 外形尺寸(mm)	1450 × 1220 × 1000 mm
Ground Clearance 最小离地间隙	165±20mm (Look at the load)
Drive Power 驱动功率	4×2000W
Battery 电池	48V 120AH ≈6KWH

Max Speed 最高行驶速度	0-16Km/h
Chassis Weight 底盘自重	300KG
Protection Rating 防护等级	IP64
Supply Voltage 供电电压	DC 48V


Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-W250

Heavy Wheeled Chassis · 重型轮式底盘



FRONT 3/4 · 前 3/4 视角

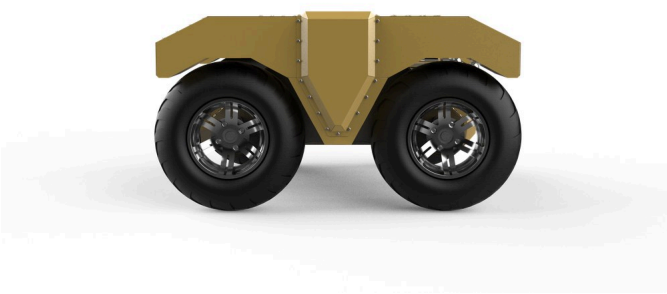

SIDE · 侧视

Rated Payload 额定载重	250 kg
Dimensions (L×W×H) 外形尺寸(mm)	1530(±5) × 1485(±5) × 835(±5) mm
Ground Clearance 最小离地间隙	210±50 mm
Max Climbing 最大爬坡度	30°
Travel Unit 行走机构	High-quality rubber
Drive Power 驱动功率	2 × 8000 W
Supply Voltage 供电电压	DC 72 V

Max Speed 最高行驶速度	0~15 km/h
Chassis Weight 底盘自重	500 kg
Protection Rating 防护等级	IP54 (IP64 optional)
Vertical Obstacle 垂直越障	210 mm
Suspension 悬挂形式	Swing arm
Wheel Diameter 轮/驱动轮直径	630 mm

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-G10

Micro Wall-Climbing Chassis · 微型爬壁式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	10 kg (90° vertical)	Max Speed 最高行驶速度	0–0.39 m/s
Dimensions (L×W×H) 外形尺寸(mm)	390 × 342 × 100 mm	Chassis Weight 底盘自重	7.5 kg (without battery)
Protection Rating 防护等级	IP54 (upgradable to IP65, but this will reduce the ability to adapt to large curved surfaces)	Travel Unit 行走机构	Polyurethane & magnet composite
Track Width 履带宽度	40 mm	Drive Power 驱动功率	240W × 2
Battery 电池	Li-ion DC 24V 10Ah	Wheel Diameter 轮/驱动轮直径	75.6 mm
Rated Torque 额定扭矩	16.8 Nm	Supply Voltage 供电电压	DC 22.2V

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。

AT-G40

Compact Wall-Climbing Chassis · 紧凑型爬壁式底盘



FRONT 3/4 · 前 3/4 视角



SIDE · 侧视

Rated Payload 额定载重	40 kg (vertical) DC 48 V
Dimensions (L×W×H) 外形尺寸(mm)	610 × 610 × 220 mm
Ground Clearance 最小离地间隙	27 mm
Drive Power 驱动功率	2 × 460 W
Supply Voltage 供电电压	DC 48 V

Max Speed 最高行驶速度	0–0.12 m/s
Chassis Weight 底盘自重	45 kg
Protection Rating 防护等级	IP65
Wheel Diameter 轮/驱动轮直径	180 mm

Drive, VCU, radio controller, battery and charger included. 标配含驱动单元、VCU、遥控器、电池与充电器。